

Calibration Label Kit

Generate durable, laminated gage and calibration labels directly out of GAGEtrak Calibration Management software.

- Available in Wi-Fi® and network versions (multiple connectivity options)
- Larger print capacity up to 1.42 inches (36 mm) and greater print resolution (360dpi)
- Li-ion rechargeable battery (optional)
- Fast label printing and built-in auto cutter
- Comes complete with software, design tools and accessories
- Drop-in tape cartridge design helps make media replacement hassle-free
- Includes PT-Editor 5 professional barcode and label design/print software application



Print one label or hundreds at a time, on demand.



Brother PT-P900W (desktop) and PT-P950NW (network) wireless desktop thermal transfer label printers are complete solutions that include the printer, label design software, an optional rechargeable battery and a full-length UL certified tape. These small footprint printers produce wide, premium-quality laminated labels at 360dpi print resolution, up to 1.26 inch (32mm) print height on 1.42 inch (36mm) tape, and have a built-in, dual-blade, automatic cutter that can produce a strip of pre-cut labels.

P-touch laminated labels are designed and tested for use in harsh environment applications to offer protection from moisture, temperature extremes, industrial chemicals, UV and abrasion. All printing is done on the underside of a clear polyester lamination layer as part of the printing process which saves time and eliminates the need for a manual over-lamination process. The result is an extremely durable label that stands up to the toughest conditions.

A special feature of these printers is that large label print jobs can be distributed simultaneously and evenly among multiple printers. Using this distributed printing mode will reduce the total printing time and reduce overall throughput. Distributed printing is available via the USB and Ethernet (PT-P950NW) interfaces.

Harsh Environment Applications

Manufacturing / Warehouse:

- Asset management and calibration labels
- Product and bin labels
- Work-in-process labels

Telecom / Datacom:


- Cable and wire markers
- Patch panels
- Asset management

Healthcare:

- Specimen labels
- Test tube and slide labels
- Autoclave / sterilization tray labels

Retail:

- Freezer labels
- Shelf labels
- Small signage

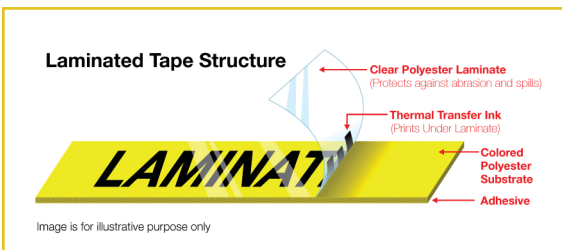

Technical Specifications

Models	PT-P900W	PT-P950NW
Type of Printer	Powered Desktop Label Printer	Powered Network Label Printer
Print Technology	Laminated Thermal Transfer	
Print Resolution	360x360 dpi(Standard), 360x720 dpi (High Resolution), 360x180 dpi (Draft)	
Print Width	1.26" (32mm)	
Print Speed	Up to 2.3 ips (60mm/sec) at 360x360 dpi, Up to 3.1 ips (80mm/sec) at 360x180 dpi	
Cutter	Automatic Dual Blade Cutter (Full and Easy to Peel Strip Cutting)	
Media	HGe & TZe Tapes, HSe Heat Shrink Tube, Fle Die Cut Label Cartridges	
Media Sizes (width)	1.4" (36mm), .94" (24mm), .71" (18mm), .47" (12mm), .35" (9mm), .24" (6mm), .14" (3.5mm)	
Interfaces	Wi-Fi WLAN 802.11b/g/n, USB 2.0, RS-232C Serial	Ethernet (10/100Base-TX), Wi-Fi WLAN 802.11b/g/n, USB 2.0, Host USB, RS-232C Serial, Bluetooth v2.1 (optional)
LAN IPv4 Protocols	ARP, RARP, BOOTP, DHCP, APIPA (Auto IP), mDNS, WINS, NetBIOS Name Resolution, DNS Resolver, LPR/LPD, Custom Raw Port/Port9100, FTP Server, TFTP Client and Server, ICMP Web Services, LLMNR Responder, SNMPv1/v2c	
LAN IPv6 Protocols	NDP, RA, DNS Resolver, LPR/LPD, mDNS, Custom Raw Port/Port9100, FTP Server, SNMPv1, TFTP Client and Server, ICMP, LLMNR Responder, SNMPv1/v2c	
Wireless Security	SSID (32 Characters), WEP 64/128 bit, WPA2-PSK (AES), LEAP, EAP-FAST, PEAP, EAPTLS, EAP-TTLS	
Operating Systems	Windows Server 2012 R2/2012/2008 R2/2008 (32/64 bit), Windows 10 (32/64 bit)/ 8 (32/64 bit) / 7 (32/64bit), Windows Vista (32/64bit), Mac OS X 10.10x – 10.8x, Android 1.6 (or Greater), iOS 3.0 (or Greater)	
Included Applications	Windows: P-touch Editor v5.1 (with Cable Labeling Wizard), Transfer Manager v2.2, Printer Setting Tool, BRAdmin Lite Mac: P-touch Editor v5.1, Transfer Manager, Printer Setting Tool Android: Mobile Cable Label Tool, Mobile Transfer Express (Available on Google Play Store) iOS: Mobile Cable Label Tool, Mobile Transfer Express (Available on Apple App Store)	
Memory	Download: Up to 99 Templates, Databases & Images (up to 7MB)	
Fonts & Barcodes	Resident Fonts: Helsinki and Letter Gothic Barcode Fonts: Linear: Code39, ITF (I-2/5), UPC-A, UPC-E, EAN8, EAN13, Codabar (NW-7), Code128, GS1-128 (UCC/EAS-128), GS1, DataBar (RSS) 2-Dimensional: PDF417, QR Code, Data Matrix, Maxicode	
Graphics	Compatible Image Formats (BMP, DIB, JPG/JPEG, TIFF, GIF, PNG, WMF, EMF, ICO)	
Power Supply	120-240VAC, 60/50 Hz, 1.8 Amps AC Adapter, Li-ion Rechargeable Battery (Optional)	
Contents	PT-P900W or PT-P950NW, .94" x 26.2' Extra Strength Adhesive Tape (TZeS251) AC Adapter (AD9100ESA), AC Power Cord, USB Cable	
Optional Accessories	Li-ion Rechargeable Battery Pack	
Dimensions & Weight	4.7" x 5.7" x 7.6" (WxHxD), 3.3 lbs	
Energy Star Qualified	Yes	
Warranty	2 Year Limited Warranty	

Create durable, laminated, bar-coded gage and calibration labels directly out of GAGetrak to minimize errors and reduce costs. Contact us today to place your order!



1-800-777-7020 +1 (480) 922-7300
 sales@cybermetrics.com support@cybermetrics.com
 www.cybermetrics.com